



INTRODUCTION

Aksa power generation system, providing optimum performance, and reliability, for stationary standby, prime power, and continuous duty applications. All generator sets are factory build, and production tested.

Power (kVA)

3 Phase, 50 Hz, PF 0.8

VOLTAGE	STANDBY RATING (ESP)		PRIME RATING (PRP)		Standby Amper
	kW	kVA	kW	kVA	
400/231	1000,00	1250,00	900,00	1125,00	1804,27

STANDBY RATING (ESP) Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528-1. Overload is not allowed.

PRIME RATING (PRP) Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528-1. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation.

General Characteristics

Model Name	AP 1250
Frequency (Hz)	50
Fuel Type	Diesel
Engine Made and Model	PERKINS 4008-30TAG3
Alternator Made and Model	ECO 43-2M/4 A
Control Panel Model	DSE 7320
Canopy	AK 96

ENGINE SPECIFICATIONS

Engine	PERKINS
Engine Model	4008-30TAG3
Number of Cylinder (L)	8 cylinders - in line
Bore (mm.)	160
Stroke (mm.)	190
Displacement (lt.)	30,56
Aspiration	Turbo Charged
Compression Ratio	13,6:1
RPM (d/dk)	1500



Oil Capacity (Total With Filter) (lt)	153
Fuel Type	Diesel
Injection Type and System	Unit
Type of Fuel Pump	Mechanical
Governor System	Electronic
Operating Voltage (Vdc)	24 Vdc
Charge Alternator (A)	55
Cooling Method	Water Cooled
Cooling Fan Air Flow (m3/min)	1140
Coolant Capacity (engine only / with radiator) (lt)	140
Air Filter	Dry Type
Fuel Cons. Prime With %100 Load (lt/hr)	244
Fuel Cons. Prime With %75 Load (lt/hr)	188
Fuel Cons. Prime With %50 Load (lt/hr)	120

ALTERNATOR CHARACTERISTICS

Manufacturer	Mecc Alte
Alternator Made and Model	ECO 43-2M/4 A
Frequency (Hz)	50
Power (kVA)	1150
VOLTAGE (V)	400
Phase	3
A.V.R.	DER1
Voltage Regulation	(+/-)0,5%%
Insulation System	H
Protection	IP23
Rated Power Factor	0.8
WEIGHT COMP. GENERATOR (Kg)	2395
COOLING AIR (m³/min)	90

Open Gen.Set Dimensions (mm)

LENGTH	4646
WIDTH	2204
HEIGHT	2000
DRY WEIGHT (kg.)	7000
TANK CAPACITY (lt.)	1500


Gen.Set Canopy Dimensions (mm)

LENGTH	7500
WIDTH	2300
HEIGHT	2508
DRY WEIGHT (kg.)	11200



TANK CAPACITY (lt.)

1500

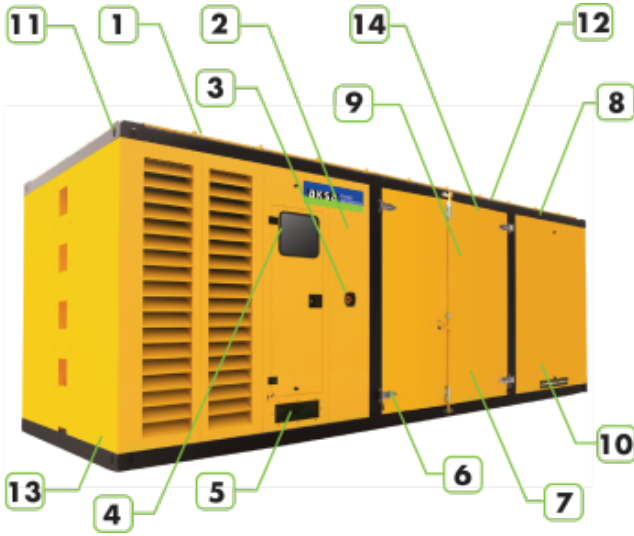

1. Steel structure made from steel sheet and steel profiles.
2. Canopy and panels made from powder coated sheet steel.
3. Emergency stop push button.
4. Control panel is mounted on the baseframe . Located at the back of the generator set
5. Cables out locations are under or back of the canopy.
6. Corrosion-resistant locks and hinges.
7. Oil could be drained via valve and a hose
8. Exhaust system in the canopy.
9. Special large access doors for easy maintenance
10. Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door.
11. Lifting points similar to ISO container , located on each top corner of the canopy.
12. the cap on the canopy provides easy access to radiator cap.
13. sound proofing materials
14. Integrated ladder built in to side of the canopy allows access to the top of the canopy.

INTRODUCTION

Sound-attenuated and weather protective enclosures for generating sets from Aksa, meet even the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Control Panel

Control Module	DSE
Control Module Model	DSE 7320
Communication Ports	MODBUS



1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's
7. Operation selecting buttons

Devices

DSE, model 7320 Auto Mains Failure control module Static battery charger Emergency stop push button and fuses for control circuits

CONSTRUCTION and FINISH

- Comonents installed in sheet steel enclosure.
- Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

INSTALLATION

Control panel is mounted generating set baseframe on robust steel stand or power module. Located at side of generating



set with properly panel visibility.

GENERATING SET CONTROL UNIT

The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines.

The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.

The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

STANDARD SPECIFICATIONS

Microprocessor controlled

- 132 x 64 pixel LCD display makes information easy to read
- Front panel programming and also via PC software
- Soft touch membrane keypad and five key menu navigation
- Remote communications via RS232, RS485 and ethernet.
- Event logging (50) showing date and time
- Multiple date and time engine exercise mode and maintenance scheduler
- Engine block heater control.
- Controls; stop, manual, auto, test, start, mute lamp test/transfer to generator, transfer to mains, menu navigation.

Instruments

ENGINE

Engine speed

Oil pressure

Coolant temperature

Run time Battery volts

Engine maintenance due

GENERATOR

Voltage (L-L, L-N)

Current (L1-L2-L3)

Frequency

Earth current

kW

Pf

kVA_r

kWh, kVA_h, kVA_rh

Phase sequence

MAINS

Voltage (L-L, L-N)

Frequency

WARNING



Charge failure
Battery under voltage
Fail to stop
Low fuel level (opt.)
kW over load
Negative phase sequence
Loss of speed signal
PRE-ALARMS
Low oil pressure
High engine temperature
Low engine temperature
Over /Under speed
Under/over generator frequency
Under/over generator voltage
ECU warning
SHUT DOWNS
Fail to start
Emergency stop
Low oil pressure
High engine temperature
Low coolant level
Over /Under speed
Under/over generator frequency
Under/over generator voltage
Oil pressure sensor open
Phase rotation
ELECTRICAL TRIP
Earth fault
kW over load
Generator over current
Negative phase sequence

Options

High oil temperature shut down
Low fuel level shut down
Low fuel level alarm
High fuel level alarm
EXPANSION MODULES
Editional LED module (2548)



Expansion relay module (2157)

Expansion input module (2130)

Standards

Electrical Safety / EMC compatibility

BS EN 60950 Electrical business equipment

BS EN 61000-6-2 EMC immunity standard

BS EN 61000-6-4 EMC emission standard

STATIC BATTERY CHARGER

Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.

Battery charger models' output V-I characteristic is very close to square

2405 has fully output short circuit protection and it can be used as a current source.

2405 charger has high efficiency, long life, low failure rate, light weight and low heat radiated in accordance with linear alternatives.

The charger is fitted with a protection diode across the output.

Charge fail output is available.

Connect charge fail relay coil between positive output and CF output.

Input: 196-264V.

Output: 27,6V 5A or 13,8V 5A.

STANDARD SPECIFICATIONS

- Heavy duty, water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket water heater
- Steel base frame and anti-vibration isolators
- Fuel tank under the base frame
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

OPTIONAL EQUIPMENTS

ENGINE

Fuel-Water Separator Filter

Oil heater

ALTERNATOR



Anti-Condensation Heater

Over sized alternator

Main line circuit breaker

CONTROL SYSTEM

Automatic synchronising and power control system (multi gen-set Parallel)

Transition synchronization with mains

Remote annunciator panel

Remote relay output

Alarm output relays

Earth fault, single set

Charge Ammeter

TRANSFER SWITCH

Three or four pole contactor

Three or four pole motor operated circuit breaker

OTHER ACCESSORIES

Main Fuel Tank

Automatic or manual fuel filling system

Manual oil drain pump

Electrical oil drain pump

Low and high fuel level alarm

Residential silencer

Enclosure: weater protective or sound attenuated

Duct adapter (on radiator)

Inlet and outlet motorised louvers

Inlet and outlet acoustic baffles

Tool kit for maintenance

1500/3000 hours maintenance kit

Supplied with oil and coolant - 30 °C

AKSA CERTIFICATES

- TS ISO 8528
- CE
- SZUTEST
- 2000/14/EC